


NEO-FLEX COUPLING

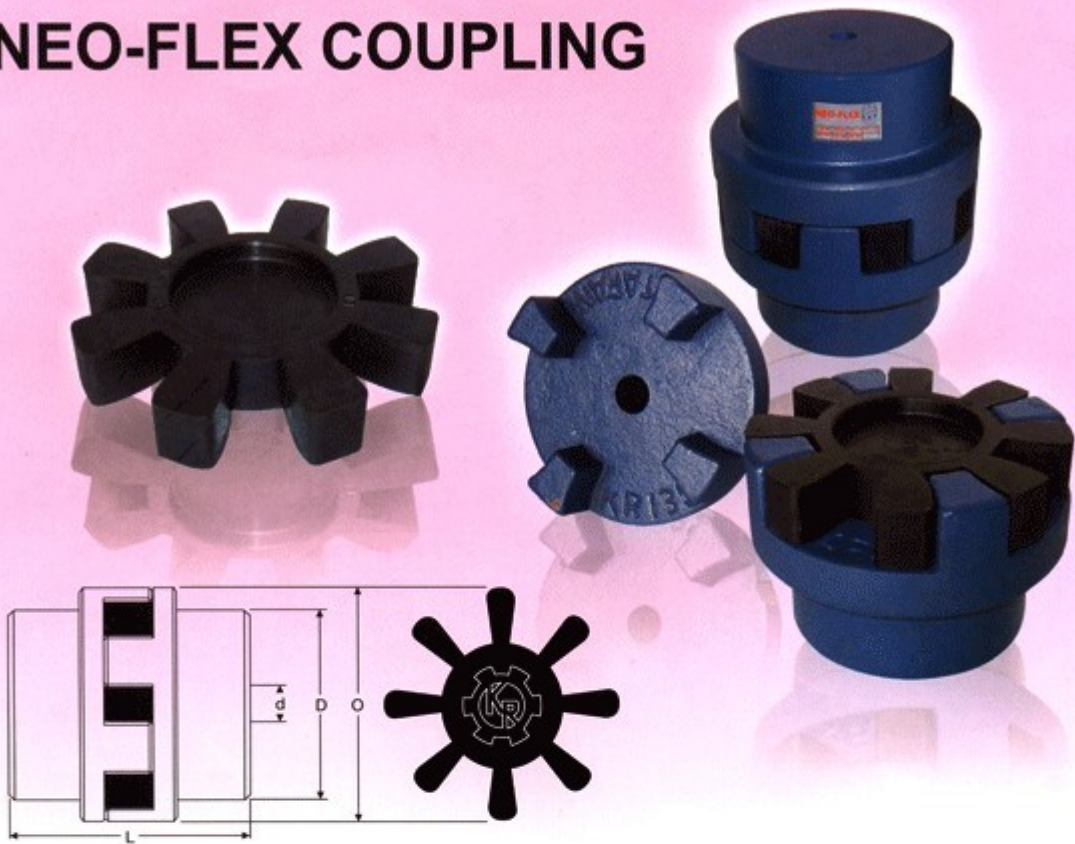

Coupling Number	Bore Diametre		L mm.	D mm.	O mm.	KW	HP	Type No.
	d mm.	Max mm.						
KR80	14	25	80	55	80	3	1-3	1KR-3012
KR95	19	35	100	75	95	7.5	5-7.5	5KR-4016
KR115	19	45	140	90	115	15	10-15	10KR-5018
KR135	19	55	155	105	135	30	15-30	15KR-6020
KR160	25	70	175	120	160	40	20-40	20KR-7022
KR180	25	80	190	130	180	60	40-60	40KR-8024
KR200	25	95	200	140	200	80	65-95	50KR-9026

รุ่น	Max. Bore	
	นิ้ว	มม.
KR-80 (1KR-3012)	1	25
KR-95 (5KR-4016)	1-3/8	35
KR-115 (10KR-5018)	1-3/4	45
KR-135 (15KR-6020)	2-1/8	55
KR-160 (20KR-7022)	2-3/4	70
KR-180 (40KR-8024)	3-1/8	80
KR-200 (50KR-9026)	3-3/4	95